
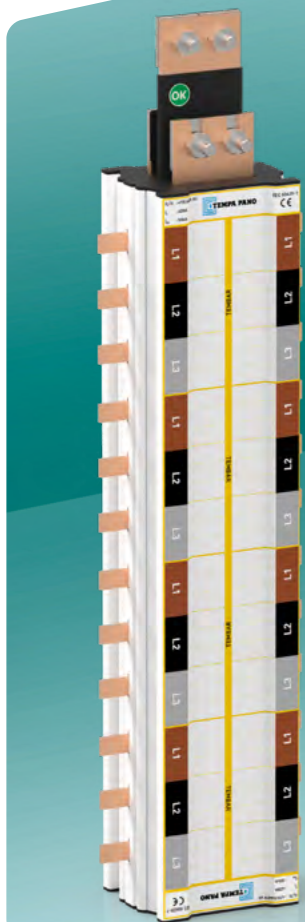



Characteristics

- Totally encapsulated, fully insulated 400A & 800A 415V_{AC} busbar system
- 400A / 800A system short circuit withstand is certified at 50 kA for 1second
- Suitable for BSEN / EN / IEC 60439-1 form 1-4 switchboard construction
- One piece copper construction
- Maintenance free
- Colour coding for all connections as standard
- Shroud for spare / unused outgoing terminals
- 400A - 800A incoming interconnectors
- Designed to direct connection for most major manufacturers MCCBs having outgoing terminal centres of 25, 30 and 35mm
- Tin plated as standart

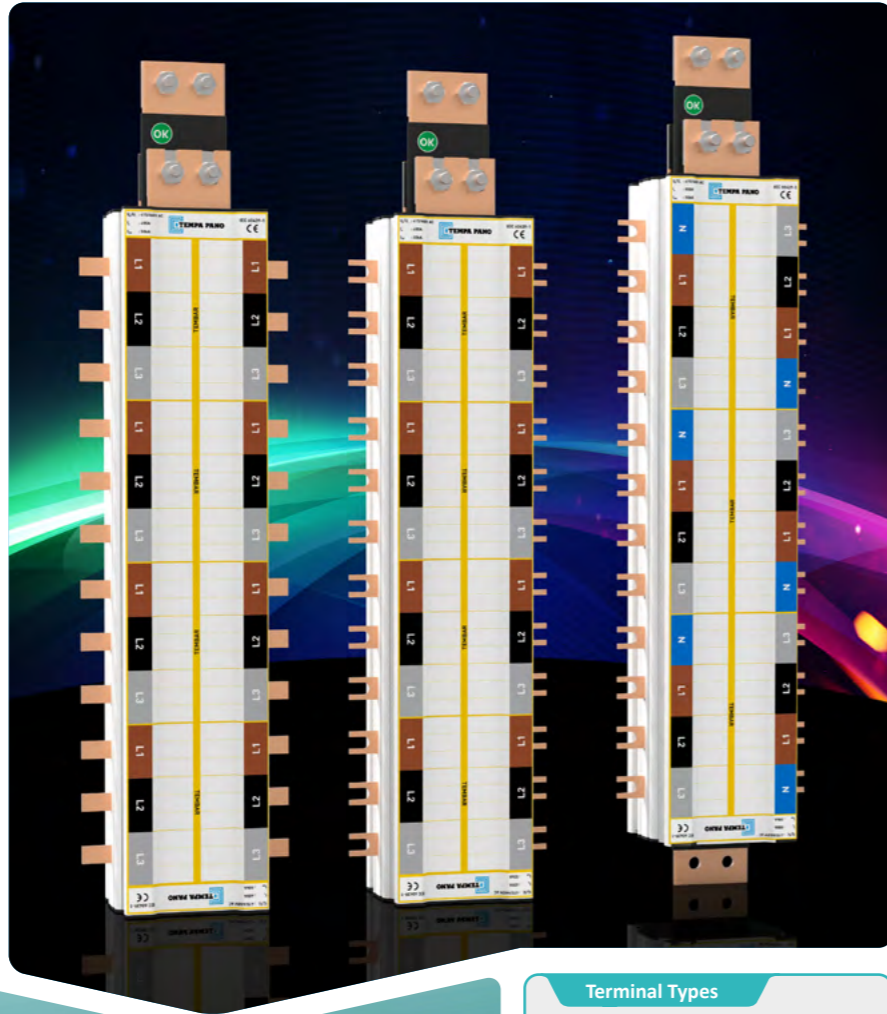


Terminal Types

N Type Terminal

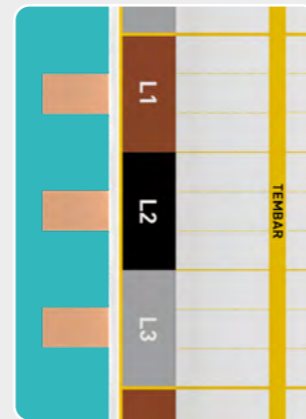



H Type Terminal

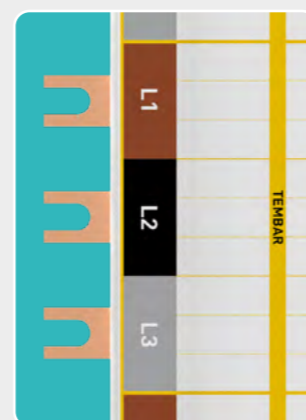

Incoming Current	pole	Outgoing Terminal Centres	Way	Reference	H	Type	Mounting Kit Reference
A		mm			mm		
400	3P	25	6	TT 06254X	368	1	TT BK0625
			8	TT 08254X	445	1	TT BK0825
			10	TT 10254X	522	1	TT BK1025
			12	TT 12254X	599	1	TT BK1225
		30	6	TT 06304X	408	1	TT BK0630
			8	TT 08304X	500	1	TT BK0830
			10	TT 10304X	592	1	TT BK1030
			12	TT 12304X	684	1	TT BK1230
		35	6	TT 06354X	448	1	TT BK0635
			8	TT 08354X	555	1	TT BK0835
			10	TT 10354X	662	1	TT BK1035
			12	TT 12354X	769	1	TT BK1235
	3P+N	25	6	TM 06254X	483	2	TM BK0625
			8	TM 08254X	585	2	TM BK0825
			10	TM 10254X	687	2	TM BK1025
			12	TM 12254X	789	2	TM BK1225
		30	6	TM 06304X	538	2	TM BK0630
			8	TM 08304X	660	2	TM BK0830
			10	TM 10304X	782	2	TM BK1030
			12	TM 12304X	904	2	TM BK1230
		35	6	TM 06354X	593	2	TM BK0635
			8	TM 08354X	735	2	TM BK0835
			10	TM 10354X	877	2	TM BK1035
			12	TM 12354X	1019	2	TM BK1235
800	3P	25	6	TT 06258X	368	1	TT BK0625
			8	TT 08258X	445	1	TT BK0825
			10	TT 10258X	522	1	TT BK1025
			12	TT 12258X	599	1	TT BK1225
		30	6	TT 06308X	408	1	TT BK0630
			8	TT 08308X	500	1	TT BK0830
			10	TT 10308X	592	1	TT BK1030
			12	TT 12308X	684	1	TT BK1230
		35	6	TT 06358X	448	1	TT BK0635
			8	TT 08358X	555	1	TT BK0835
			10	TT 10358X	662	1	TT BK1035
			12	TT 12358X	769	1	TT BK1235
	3P+N	25	6	TM 06258X	483	2	TM BK0625
			8	TM 08258X	585	2	TM BK0825
			10	TM 10258X	687	2	TM BK1025
			12	TM 12258X	789	2	TM BK1225
		30	6	TM 06308X	538	2	TM BK0630
			8	TM 08308X	660	2	TM BK0830
			10	TM 10308X	782	2	TM BK1030
			12	TM 12308X	904	2	TM BK1230
		35	6	TM 06358X	593	2	TM BK0635
			8	TM 08358X	735	2	TM BK0835
			10	TM 10358X	877	2	TM BK1035
			12	TM 12358X	1019	2	TM BK1235

H : H Type Terminal
N : N Type Terminal

Type 1

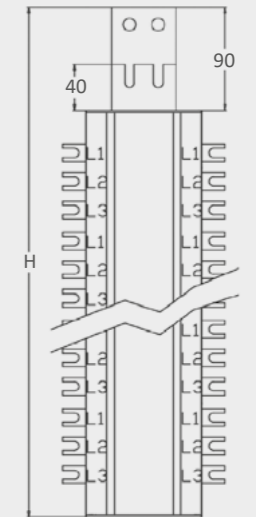

Type 2

